


Huth – Pack 50

Aramidic PTFE – Graphited Packing

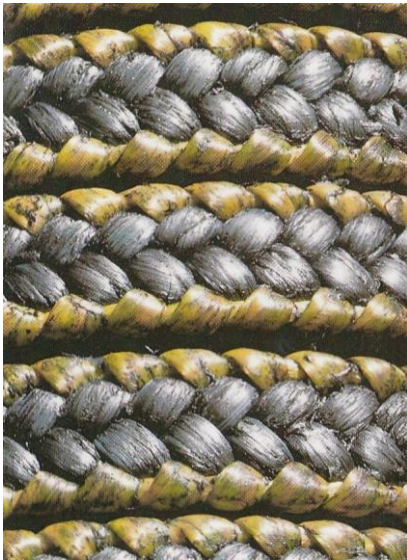

Description: Aramid fiber braided with PTFE graphited

Recommended applications: This non-asbestos packing is suitable for use in all industrial processes either in static or dynamic application. This packing can safely replace standard asbestos PTFE impregnated packings...

Technical data:

pH	Temperature	P (kg/cm ²)	V (m/sec)	friction
	-200°C	50	30	*
0-14	to	150	15	*
	+280°C	1000	3	*

Weights (gr/m): Tolerance +/- 15 %

mm	4	6	8	10	12	14	16	18	20
gr	26	58	103	160	230	314	410	520	640